

SETHDIN C232485

RS232 / RS485 / ETHERNET CONVERTERS



Compact converters connectable to any counter-top indicators of the Dini Argeo range, easy to set up.

**The best solution
for advanced industrial
applications**

SETHDIN: Technical features

- ABS case for panel mounting on Omega / DIN bar
- Dimensions l x p x h (mm): 53 x 58 x 90
- Power supply: from 12 to 24Vdc
- Operating temperature: -10°C + 50°C
- LEDs: Ethernet line presence, communication and diagnostics

SETHDIN: ETHERNET interface

- Protocols: TCP, UDP, DHCP, HTTP, ICMP, uPnP, ARP
- Connection via standard RJ45 connector
- Network Interface: 10/100 Base-T
- Visual indications of 10/100Base-ED G network connection and network activity presence
- Baud rate: 10-100Mbps

SETHDIN: Available conversions

- RS232 <--> ETHERNET
- RS485 <--> ETHERNET
- RS232 <--> RS485

NOTE:

In combination with CPWE indicators , it allows one to take advantage of a complete set of specific commands for creating automated systems for software companies, installers and OEMs.

C232485: Technical features

- ABS case for use on the table
- Dimensions l x p x h (mm): 230 x 140 x 95
- Power supply: 110-230 Vac
- Operating temperature: -10°C + 50°C

DETAIL 1




SETHDIN: Example of installation with DGT4

DETAIL 2



C232485: RS232 / RS485 converter for counter-top use

DETAIL 3

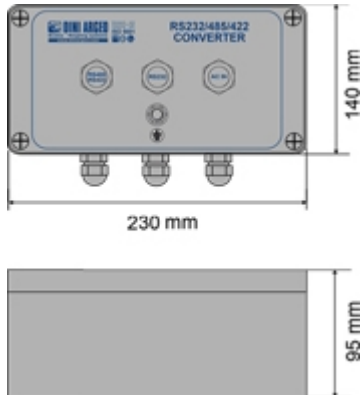

C232485: Dimensions in mm



“YOUR WORLDWIDE PARTNER FOR WEIGHING”

**DINI ARGEO
FRANCE sarl**
France

**DINI ARGEO
GMBH**
Germany

**DINI ARGEO
UK Ltd**
United Kingdom

**DINI ARGEO WEIGHING
INSTRUMENTS Ltd**
China

**DINI ARGEO
OCEANIA**
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 921784



SALES AND TECHNICAL ASSISTANCE SERVICE